

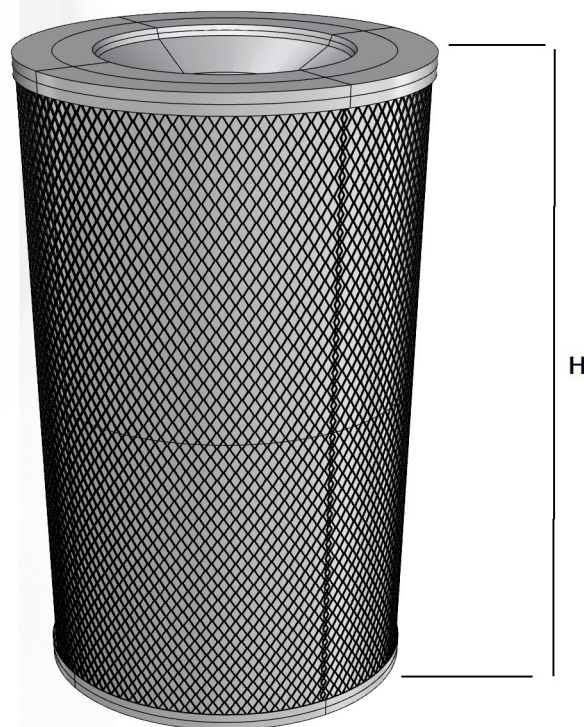


AF424M

- نقشه اصلی
- شماره بازنگری: ۰۳
- تاریخ بازنگری: ۱/۱۲

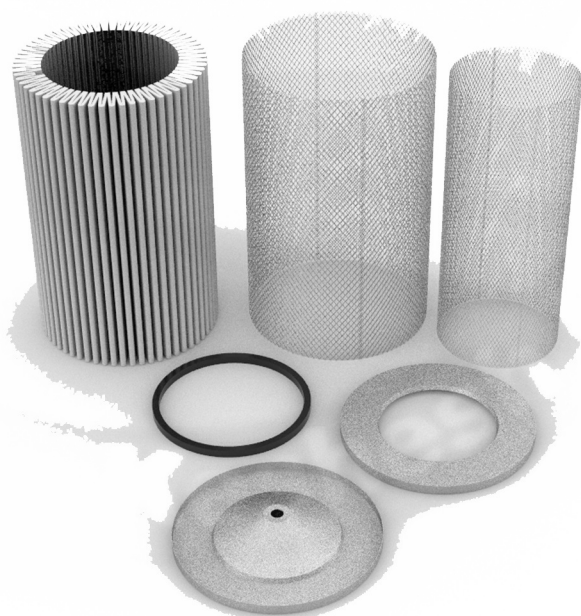

H = 407 MM

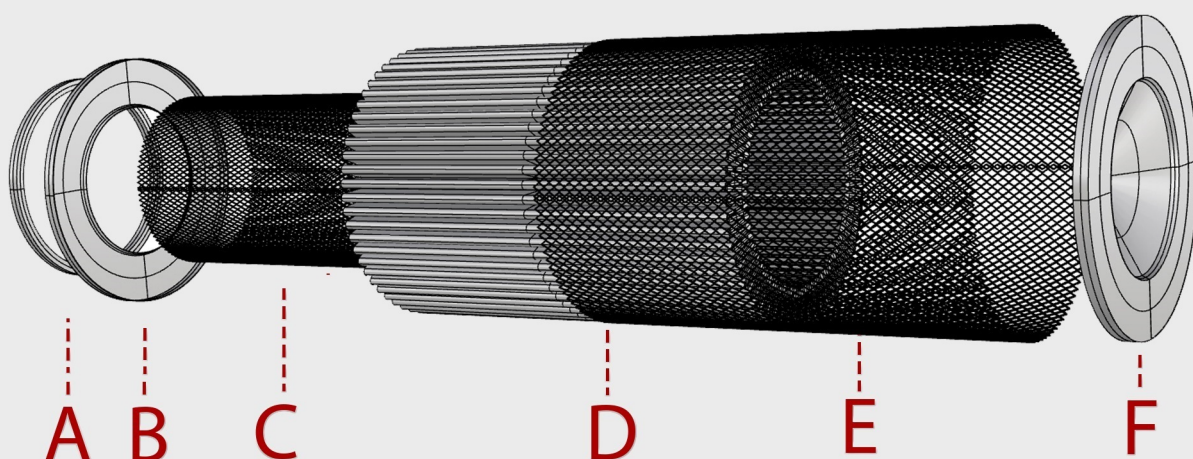

مدارک فنی فیلتر هوای توربو شارژر

AF424M

نکته: با توجه به تلورانس های ابعادی و حساسیت بالای عملکردی فیلتر فوق، خواهشمند است قبل از تولید انبوه نسبت به ارسال فیلتر اولیه و اخذ تاییدیه واحد فنی و مهندسی و صحت گذاری عملکردی، اقدام لازم صورت گیرد. این فیلتر دارای استاندارد ۳۴ ملی ایران میباشد.

A






راه آهن کَشش Rahahan Keshesh

Dimensions Materials

A	12	± 0.5 MM	EPDM (SPONGE
B	230	± 1 MM	GASKET)
C	210	± 1 MM	35 - 40 SHA
D			NOTICE : WITH ISIRI 34
E			FOR AIR FILTER
F			STANDARD
G			
H			
I			
J			
K			
L			
M			

GASKET


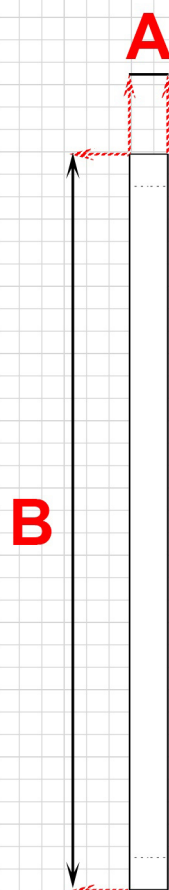
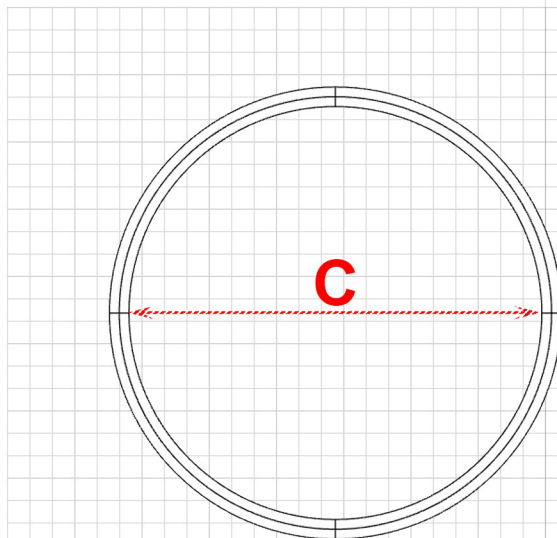
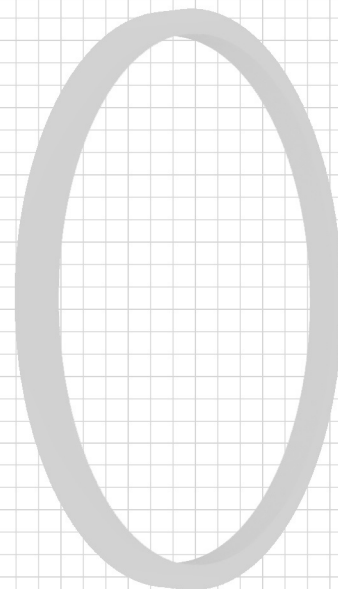


B

Dimensions **Materials**





A	54.5 ± 1 MM	IRON PLATE / GALVANIZED CODE : ST12 - ST 14 THICKNESS 0.7 MM
B	170 ± 1 MM	
C	279 ± 1 MM	
D	11 ± 1 MM	
E		
F		
G		
H		
I		
J		
K		
L		
M		

UP CAP

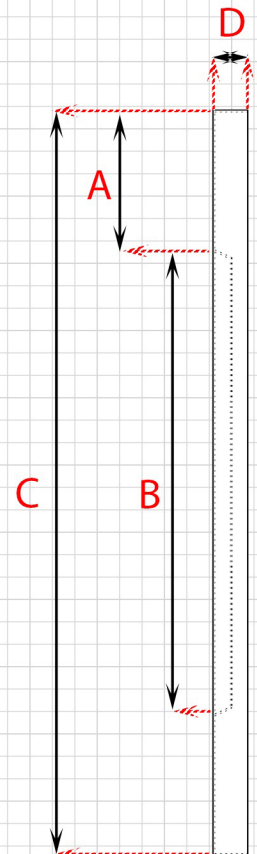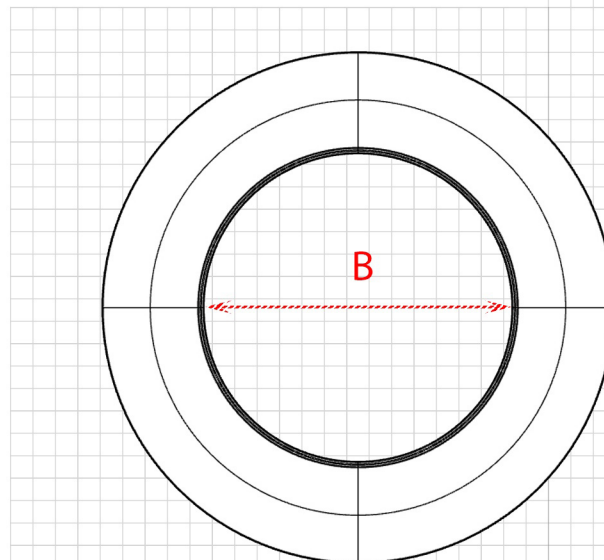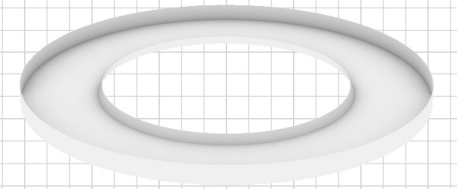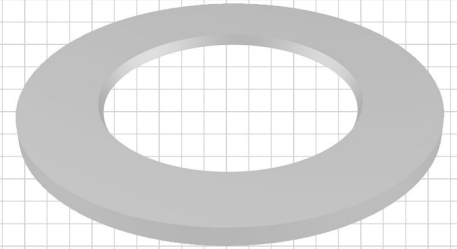



#	Dimensions	Materials
A	405 ± 1 MM	NET IRON / GALVANIZED THICKNESS 0.7 MM CODE : ST 12 - ST 14 (With rhubarb section)
B	405 ± 1 MM	
C	185 ± 1 MM	
D	275 ± 1 MM	
E		
F		
G		
H		
I		
J		
K		
L		
M		

INTERNAL(NET METAL) = C
AND
EXTERNAL(NET METAL) = E

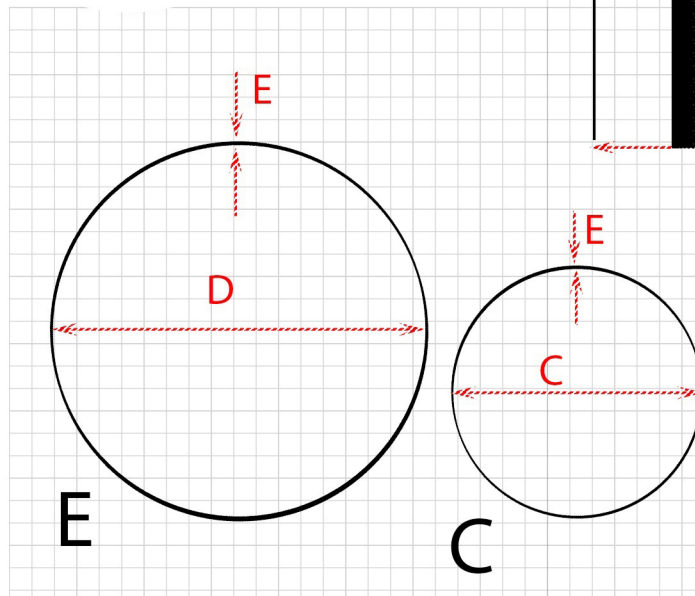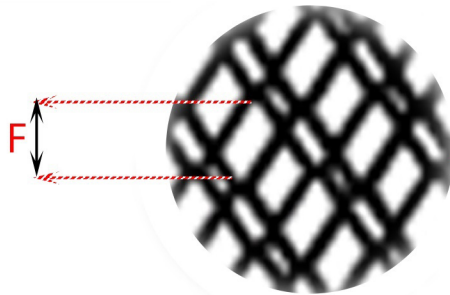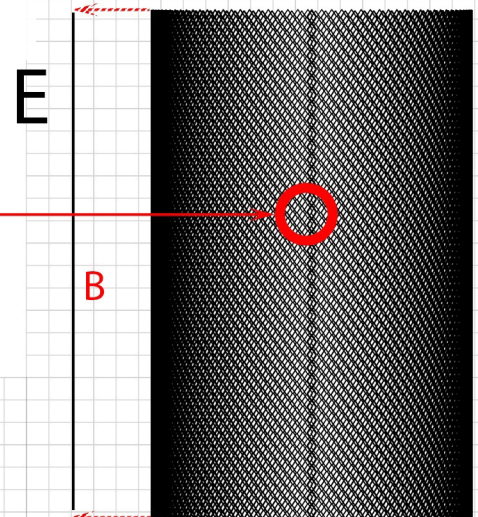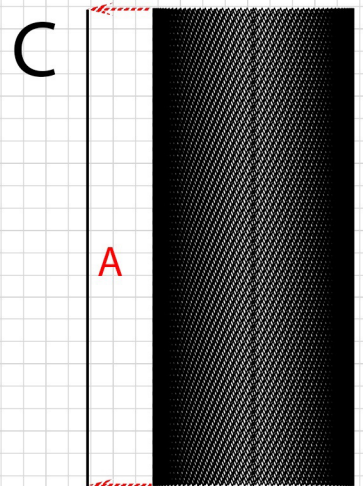

D

#	Dimensions	Materials
A	275 ± 1 MM	
B	405 ± 1 MM	
C	45 ± 1 MM	
D	1 +0.2 MM	
E		RESIN 17 - 19 %
F		COLOR WHITE
G		CELLULOSE ACRYLIC /
H		PHENOLIC RESIN
I		(for heavy duty air filter)
J		BASIS WEIGHT 145 +5 g/m ²
K		THICKNESS 0.5 - 0.6 mm MAX
L		PORE SIZE 40 μm
M		MEAN PORE SIZE 20 μm
		BURST STRENGHT 400 KPA
		EFFICIENCY < 30μm 80%
		PERMEABILITY 350 +50
		LIT /m ² . s
		FOLD NUMBER 210-220

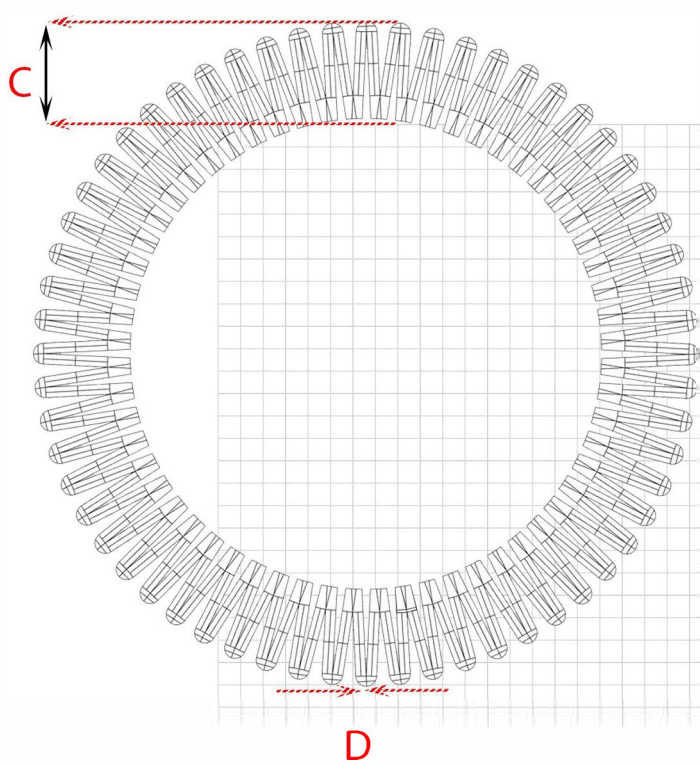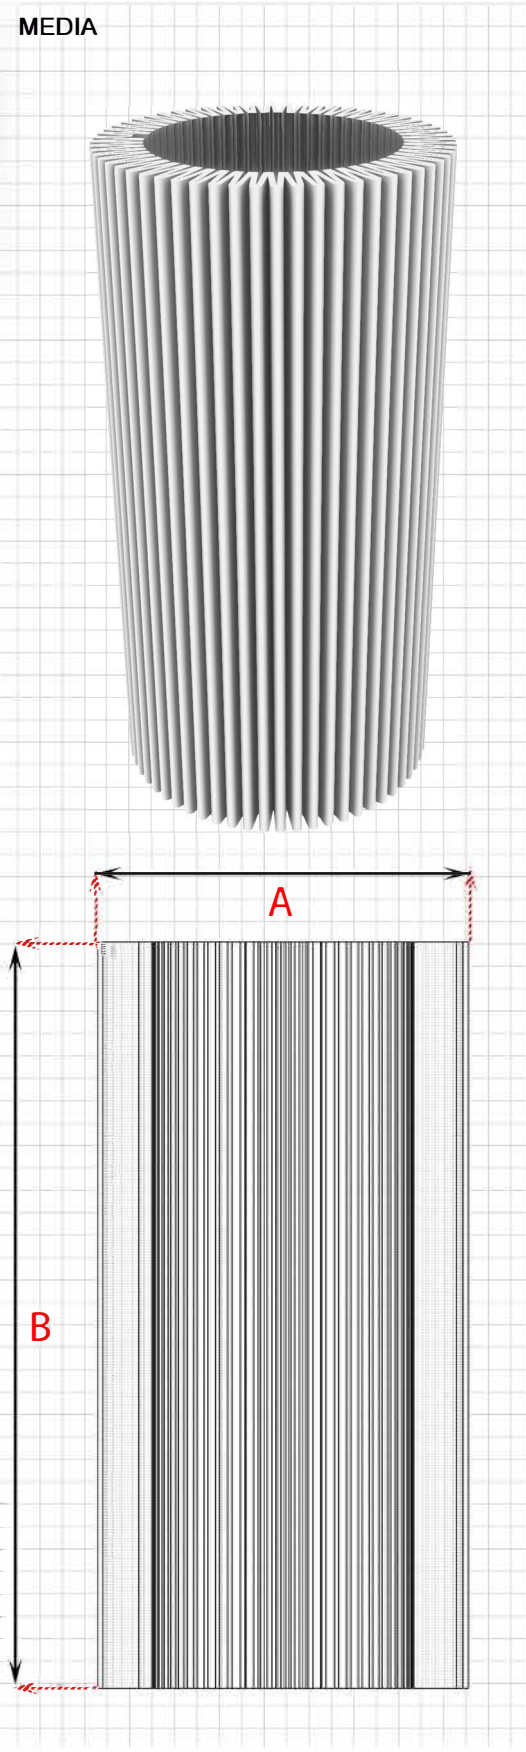

F



Rahahan Keshesh راه آهن کَشَش

Dimensions Materials

A	11 ± 0.5 MM	IRON PLATE / GALVANIZED CODE : ST 12 -ST 14 THICKNESS 0.7 MM
B	279 ± 1 MM	
C	10 ± 0.5 MM	
D	17 ± 0.5 MM	
E	28 ± 1 MM	
F	172 ± 1 MM	
G		
H		
I		
J		
K		
L		
M		

DOWN CAP

